

Wide range.

Luxa has many options so it is suitable for any type of installation:

- Sealed version IP 65 and unsealed version IP42.
- Permanent or Not Permanent.
- Battery operation for 1 or 3 hours.
- From 60 to 370 lumens.

P108275



P108280



5. Quality materials

P108272



Polycarbonate (PC) used in all of the plastic parts. A sturdy product.

6. Easy to fasten

P108271



Various options for fastening the light fitting.

7. Easy access

P108270



Quality pre-stamped holes that are easy to drill through. 16 or 20 Ø tube inlet, to IP standards.



1. Easy installation



Separate connector for fast, easy connection.

2. Safe and easy maintenance




Easy access to the parts as the fluorescent tube and the battery are incorporated in one piece.

3. Versatile: an accessory for every type of installation



Accessories for installing the light fitting in false ceilings, in electrical conduits, flush-mounted, surface-mounted, etc. Converts to an emergency illuminated sign.

4. Personalized

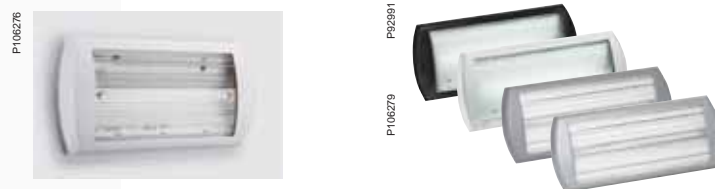

Curved frames available in 4 colours: black, white, grey and aluminium.

8. Sealed version



For places that need installation that is protected from moisture (car park for example).



P83015

CE

P82891-P-106279




Coloured frames (black, white, grey, aluminium).

Technical specifications


- b Available for maintained or non-maintained operation
- b Installation for flush mounting and false ceiling
- b Personalized with coloured frames
- b Compliant with EN 60598-2-22 standard
- b Can be inhibited with rest mode via Teleur range of remote controls
- b Protection rating: IP 42 or IP 65, IK 06 / 07 / 08
- b Insulation class: II i
- b Operating temperature: 0...40°C
- b Fire behaviour (EN 60695-2-10), incandescent wire: 850°C
- b Light source: fluorescent lamp
- b Power supply: 230 V, 50 Hz
- b Complete recharge in 12 h for models with 1 h autonomy

Dimensions

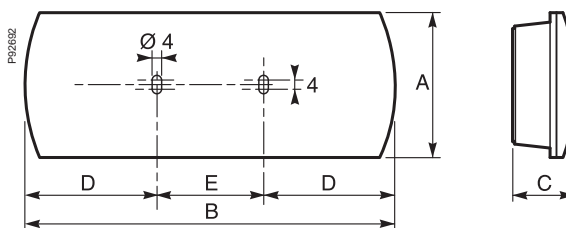


		Dimensions (mm)				
		A	B	C	D	E
6/11 W	60, 115 and 180 lm	125	288	58	102	84
8 W	90, 100, 210 and 370 lm	135	348	58	73	200

Installation methods

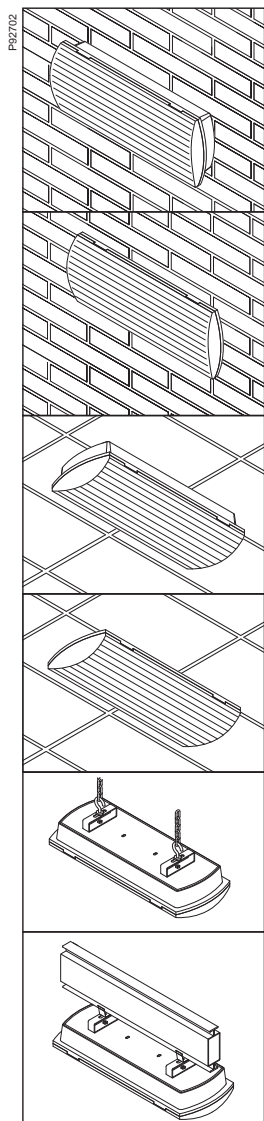

- Wall**
(installation without accessories)
- Flush**
(installation with flush mounting box)
- Ceiling**
(installation without accessories)
- False ceiling**
(installation with false ceiling kit + flush mounting box)
- Hanging**
(installation with hanging / electrified track kit)
- Electrified track**
(installation with hanging / electrified track kit)




Product catalogue numbers

Luxa	Protection rating		Autonomy (h)	Average flux (lm)		Lamp rated power (W)	socket	Consumption (VA)	Ni-Cd battery		Weight (kg)	Cat. no.	
				emergency condition	maintained mode								
 <small>PS3015</small>	Non-maintained												
	IP 42	IK 06	1	60	-	6	G5	5	2.4 V	1.5 Ah	0.85	OVA37191E	
				100	-	8	G5	5	3.6 V	1.5 Ah	0.90	OVA37093E	
		IK 07		180	-	11	2G7	5	4.8 V	1.5 Ah	0.98	OVA37192E	
		IK 06		210	-	8	G5	5	6.0 V	1.5 Ah	0.97	OVA37100E	
				370	-	8	G5	6.5	8.4 V	1.5 Ah	1.10	OVA37095E	
	IK 06	3	60	-	6	G5	5	6.0 V	1.5 Ah	1.05	OVA37193E		
			90	-	8	G5	5	4.8 V	2.2 Ah	0.97	OVA37094E		
			IK 07	115	-	11	2G7	5	6.0 V	2.2 Ah	1.05	OVA37194E	
	IP 65	IK 07	1	60	-	6	G5	5	2.4 V	1.5 Ah	0.87	OVA37195E	
				100	-	8	G5	5	3.6 V	1.5 Ah	0.92	OVA37098E	
				IK 08	180	-	11	2G7	5	4.8 V	1.5 Ah	1.00	OVA37196E
				IK 07	210	-	8	G5	5	6.0 V	1.5 Ah	0.99	OVA37101E
		IK 07	3	370	-	8	G5	6.5	8.4 V	1.5 Ah	1.12	OVA37102E	
				60	-	6	G5	5	6.0 V	1.5 Ah	1.07	OVA37197E	
				IK 08	115	-	11	2G7	5	6.0 V	2.2 Ah	1.07	OVA37198E
				Maintained									
	IP 42	IK 06	1	100	185	8	G5	10.5	3.6 V	1.5 Ah	0.90	OVA37096E	
3			90	165	8	G5	10	7.2 V	1.5 Ah	1.10	OVA37097E		
IP 65	IK 07	1	100	185	8	G5	10.5	3.6 V	1.5 Ah	0.92	OVA37099E		

Accessory catalogue numbers

	Compatibility	Dimensions (mm) height x width x depth	Cat. no.
Pictogram stickers (set of 10) 	Luxa 6/11 W	116 x 284	OVA50242E
	Luxa 8 W	126 x 342	OVA50244E
Pictogram stickers (set of 10) 	Luxa 6/11 W	116 x 284	OVA50253E
	Luxa 8 W	126 x 342	OVA50255E
Pictogram stickers (set of 10) 	Luxa 6/11 W	116 x 284	OVA50254E
	Luxa 8 W	126 x 342	OVA50256E
Pictogram stickers (set of 10)  	Luxa 6/11 W EN language	116 x 284	OVA50243E
	Luxa 6/11 W ES language	116 x 284	OVA50279E
	Luxa 8 W EN language	126 x 342	OVA50245E
	Luxa 8 W ES language	126 x 342	OVA50280E
Flush mounting box 	Luxa 6/11 W	114 x 272 x 56	OVA50345E
	Luxa 8 W	124 x 332 x 56	OVA50346E
False ceiling kit (also order a flush mounting box) 	All models		OVA50348E
Hanging / electrified track kit 	All models		OVA50347E
Frames 	Luxa 6/11 W	White 141 x 307 x 26	OVA50349E
	Luxa 8 W	White 154 x 367 x 26	OVA50352E
	Luxa 6/11 W	Black 141 x 307 x 26	OVA50351E
	Luxa 8 W	Black 154 x 367 x 26	OVA50354E
	Luxa 6/11 W	Grey 141 x 307 x 26	OVA50350E
	Luxa 8 W	Grey 154 x 367 x 26	OVA50353E
	Luxa 6/11 W	Aluminium 141 x 307 x 26	OVA53036E
	Luxa 8 W	Aluminium 154 x 367 x 26	OVA53037E
Protective grids 	Luxa 6/11 W	170 x 333 x 89	OVA50343E
	Luxa 8 W	180 x 393 x 89	OVA50344E
Exit sign kits 	Luxa 8 W	Ceiling mounting	OVA50328E
	Pictograms provided 144 x 270	Flag mounting	OVA50329E
		Wall mounting	OVA50330E
Teleur remote control 	All models (for 100 luminaires)	102 x 77 x 81 4.5 mod. of 18 mm	OVA50325E
	All models (for 500 luminaires)	90 x 71 x 60 4 mod. of 18 mm	OVA50326E

Spare parts catalogue numbers

	Description	Compatibility	Cat. no.	
Fluorescent tubes 	6 W, G5	OVA37191E, OVA37195E OVA37193E, OVA37197E	OVA51005E OVA51037E	
	8 W, G5	OVA37093E, OVA37094E, OVA37098E OVA37100E, OVA37101E OVA37096E, OVA37097E, OVA37099E OVA37095E, OVA37102E	OVA51006E OVA51043E OVA51007E OVA51008E	
	11 W, 2G7	OVA37192E, OVA37196E OVA37194E, OVA37198E	OVA51010E OVA51044E	
	Batteries (Ni-Cd) 	2.4 V, 1.5 Ah	OVA37191E, OVA37195E	OVA51012E
		3.6 V, 1.5 Ah	OVA37093E, OVA37096E, OVA37098E, OVA37099E	OVA51013E
		4.8 V, 1.5 Ah	OVA37192E, OVA37196E	OVA51016E
4.8 V, 2.2 Ah		OVA37094E	OVA51017E	
6.0 V, 1.5 Ah		OVA37100E, OVA37101E, OVA37193E, OVA37197E,	OVA51019E	
6.0 V, 2.2 Ah		OVA37194E, OVA37198E	OVA51038E	
7.2 V, 1.5 Ah		OVA37097E	OVA51021E	
8.4 V, 1.5 Ah		OVA37095E, OVA37102E	OVA51022E	
Pictogram sticker set (4 pictograms for exit signs kit)			OVA50283E	