




Cable glands PG type

Plastic pipes supplied with the corresponding gaskets and nuts. Designed to provide necessary IP code on the points where conductors pass through the walls of the electric distribution boxes. All cable gland elements are made of high quality plastic (PE) and rubber.

Technical data:

- Material: polyethylene (PE)
- Colour: gray
- Application: general
- Ambient temperature: -40 to +85°C
- IP code: IP 55

Standard: EN 60 423; 48580-81

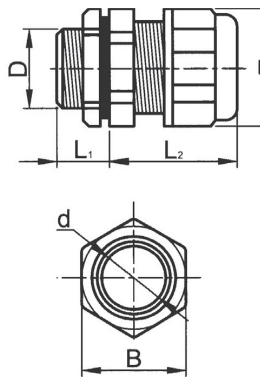


| Type | Overlapping field | T (mm) | B (mm) | d (mm) | D (mm) | L1 (mm) | L2 (mm) | Packing / Box (pcs) | Catalogue number |
|---------|-------------------|--------|--------|--------|--------|---------|---------|---------------------|------------------|
| PG-7 | 3.5-6.8 | 16.3 | 18 | 12 | 6.6 | 10 | 22 | 100 / 4000 | 500070 |
| PG-9 | 5-8 | 18.9 | 21.7 | 15.5 | 8.5 | 10 | 25 | 100 / 4000 | 500090 |
| PG-11 | 6-10 | 21.7 | 23.5 | 18.5 | 10.4 | 8.5 | 29 | 100 / 3000 | 500110 |
| PG-13.5 | 7-12 | 23.6 | 26.5 | 20 | 13 | 10 | 29 | 100 / 2000 | 500135 |
| PG-16 | 8-14 | 26.5 | 29.3 | 21.5 | 14 | 9 | 29 | 100 / 2000 | 500160 |
| PG-19 | 9-17 | 29 | 32 | 23 | 17 | 12 | 29 | 100 / 2000 | 500190 |
| PG-21 | 10-18 | 32.3 | 35.6 | 28 | 19 | 12 | 35 | 100 / 1000 | 500210 |
| PG-25 | 15-22 | 32.6 | 32.6 | 29.8 | 24 | 13 | 31 | 100 / 1000 | 500250 |
| PG-29 | 16-24 | 41.1 | 45.4 | 36 | 26 | 12.5 | 40 | 50 / 500 | 500290 |
| PG-36 | 18-28 | 52 | 58 | 46 | 31.5 | 12.5 | 45 | 50 / 350 | 500360 |
| PG-42 | 26-36 | 57.4 | 61.9 | 51 | 37.6 | 17.5 | 47 | 20 / 200 | 500420 |
| PG-48 | 32-39 | 65.2 | 70.7 | 58 | 43 | 21 | 50 | 20 / 200 | 500480 |

Support insulator for low voltage

Support insulators are used in control and distribution cabinets mounting when bars isolation is required. Provides reliable insulation of live parts.

Technical Specification:

- Rated voltage: 1000V
- Insulating voltage: 5000 V
- Ambient temperature : -40 to +90 C



| Type | Impulse voltage kV | Strength | Fasting strength | Bolt | Dimmensions (mm) | | | | Packing (pcs.) | Catalogue number |
|-------|--------------------|----------|------------------|------|------------------|----|----|----|----------------|------------------|
| | | | | | H | W | a | ø | | |
| SM 25 | 6 | 500 | 6 | 6 | 25 | 30 | 13 | 23 | 10 / 600 | 31725 |
| SM 30 | 8 | 550 | 8 | 8 | 30 | 32 | 10 | 27 | 10 / 500 | 31730 |
| SM 35 | 10 | 600 | 10 | 8 | 35 | 32 | 10 | 28 | 10 / 400 | 31735 |
| SM 40 | 12 | 650 | 12 | 8 | 40 | 40 | 10 | 33 | 10 / 240 | 31740 |
| SM 51 | 15 | 1000 | 20 | 8 | 51 | 50 | 12 | 28 | 10 / 240 | 31751 |
| SM 76 | 25 | 1500 | 40 | 10 | 76 | 45 | 16 | 34 | 10 / 120 | 31776 |